


The background of the image shows a person's hands typing on a laptop keyboard. The person is wearing a light blue button-down shirt. The laptop is silver and is placed on an orange desk mat. To the right of the laptop, there is a glass of water and a small orange container with a cactus. The background is a blurred office setting with a window showing a cityscape.

# Basic Configuration for D-Link Smart App.





- Download the D-Link Smart CCTV app from the Google or Apple Playstore.
- Once Installed you will be able to see the icon for the D-Link Smart CCTV app on your mobile screen

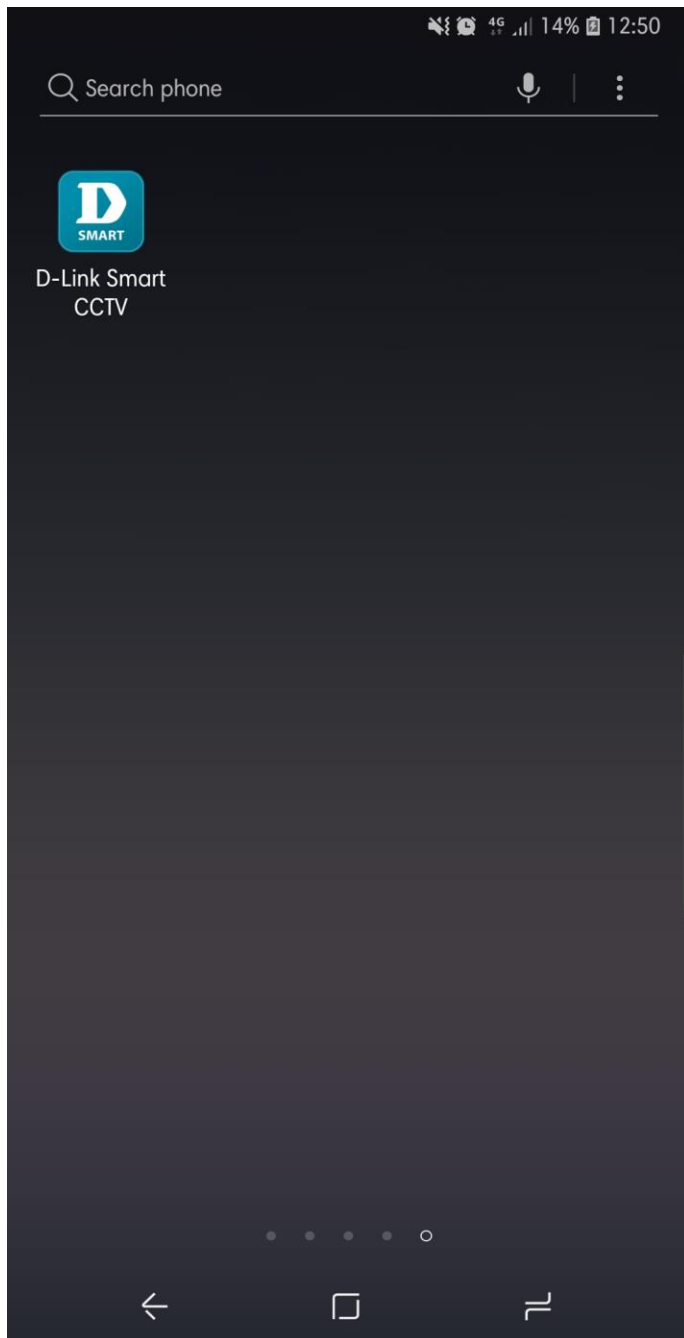


D-Link Smart CCTV


- Click on the D-Link Smart CCTV App icon to Launch the app.
- Once the app is launched it will show the initial Launch Window of the app

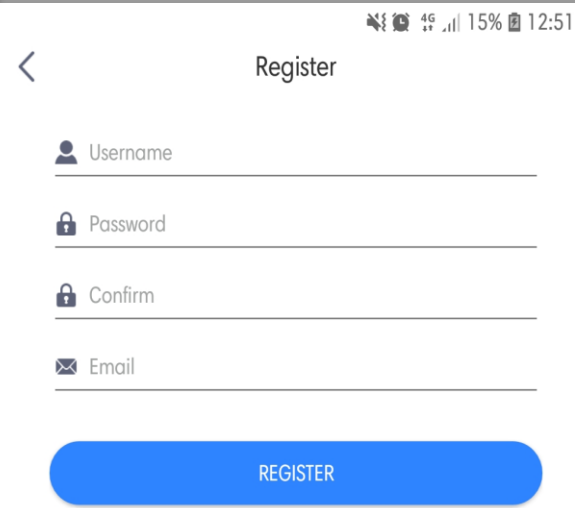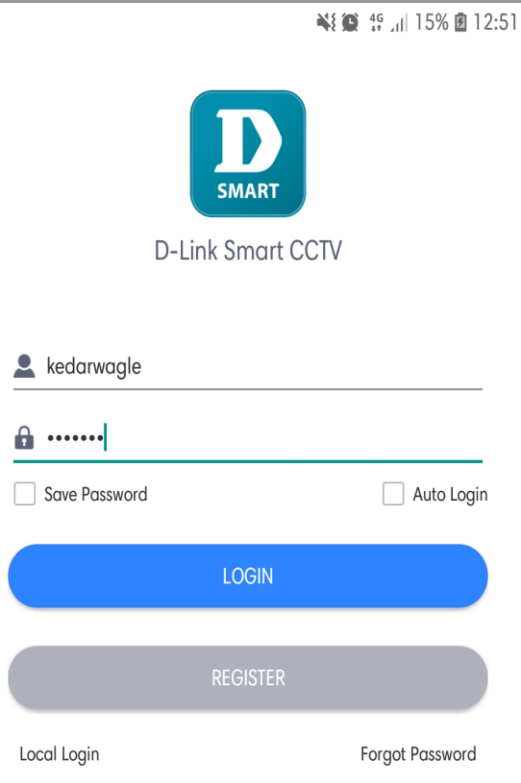


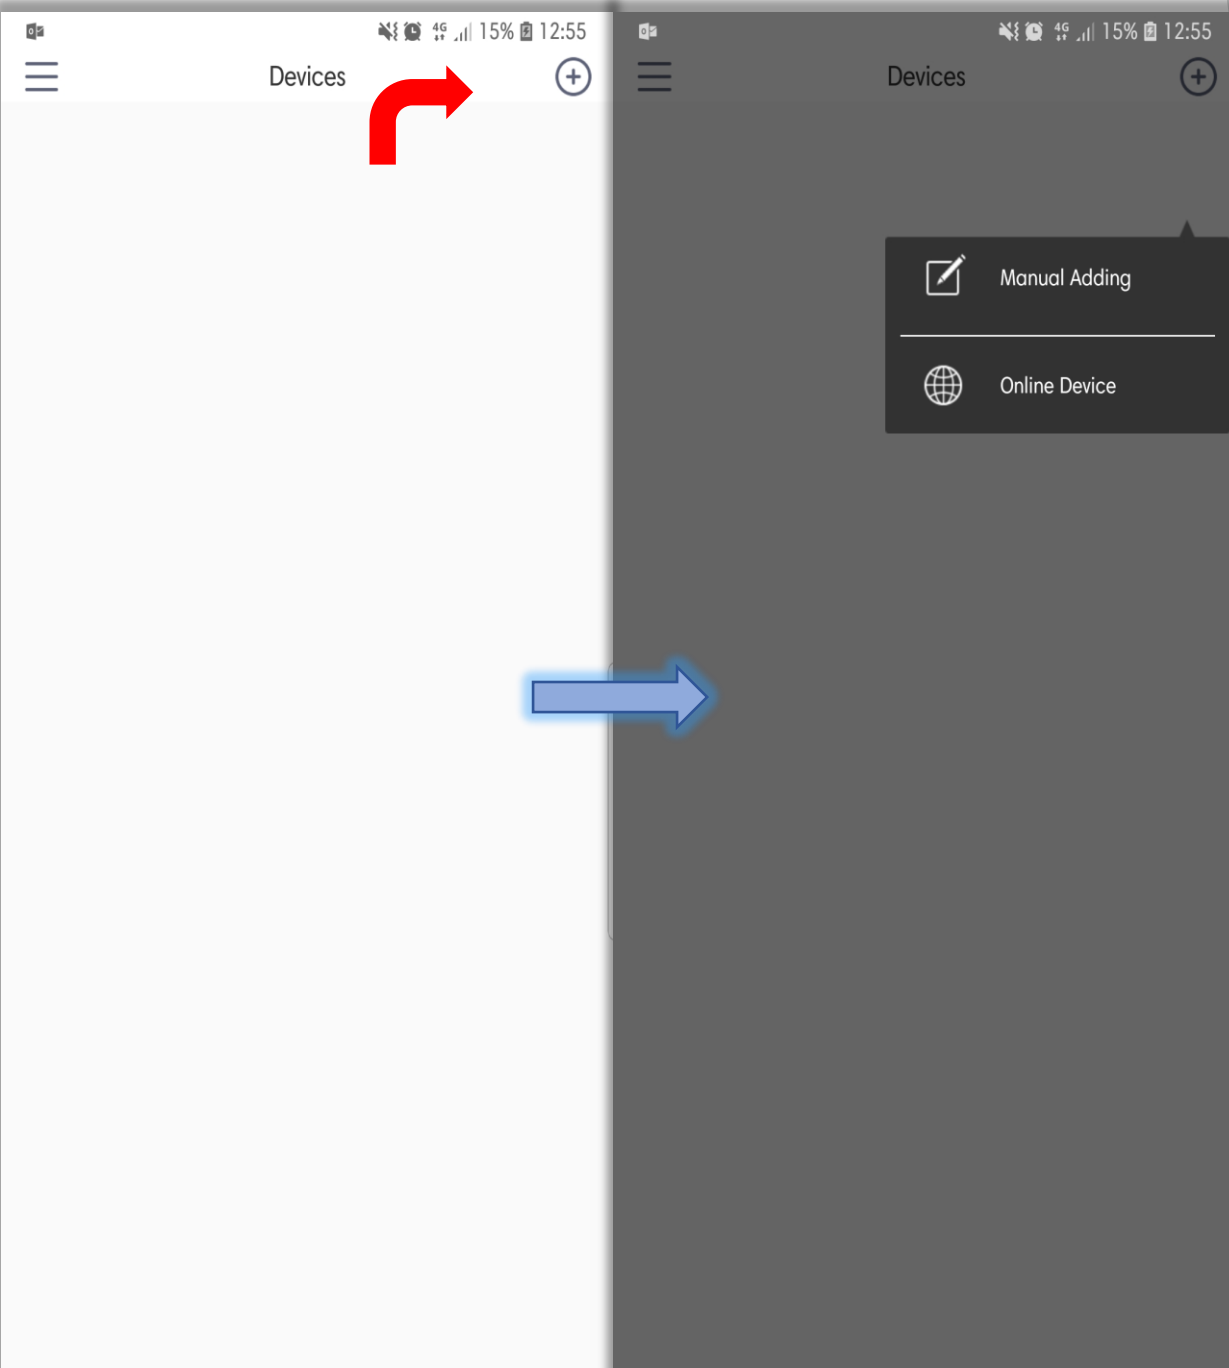
- As you can see, once the app launches you will be asked for User Authentication.
- If you are using the app for the first time, you will have to click on Register and create a User to Login
- If you have already created a User, enter your credentials and Login

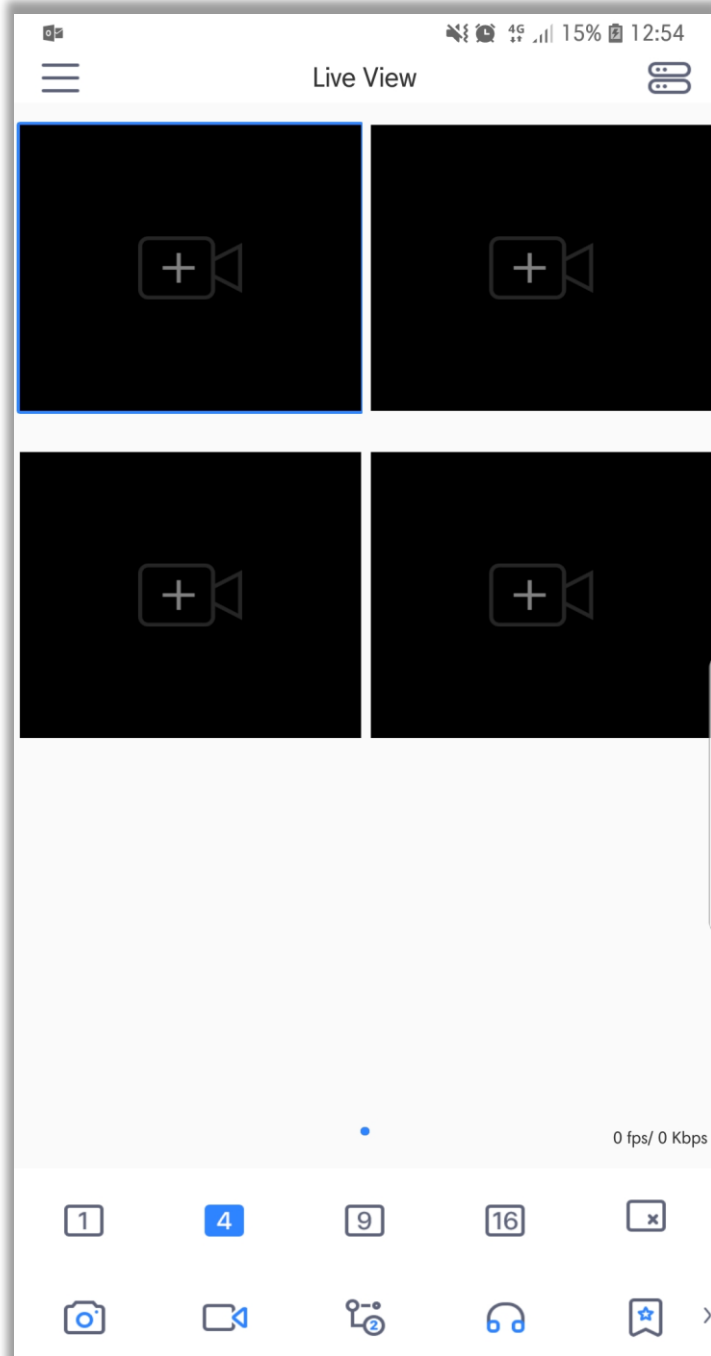


- Once you have logged in, Live View window will appear in front of you
- As you can see, there is an option to view Live View in different Channel Grids
- There is an option to take Snapshots, record Manual Videos, Change Streams, Label Recording, Enable Audio and switch to Playback

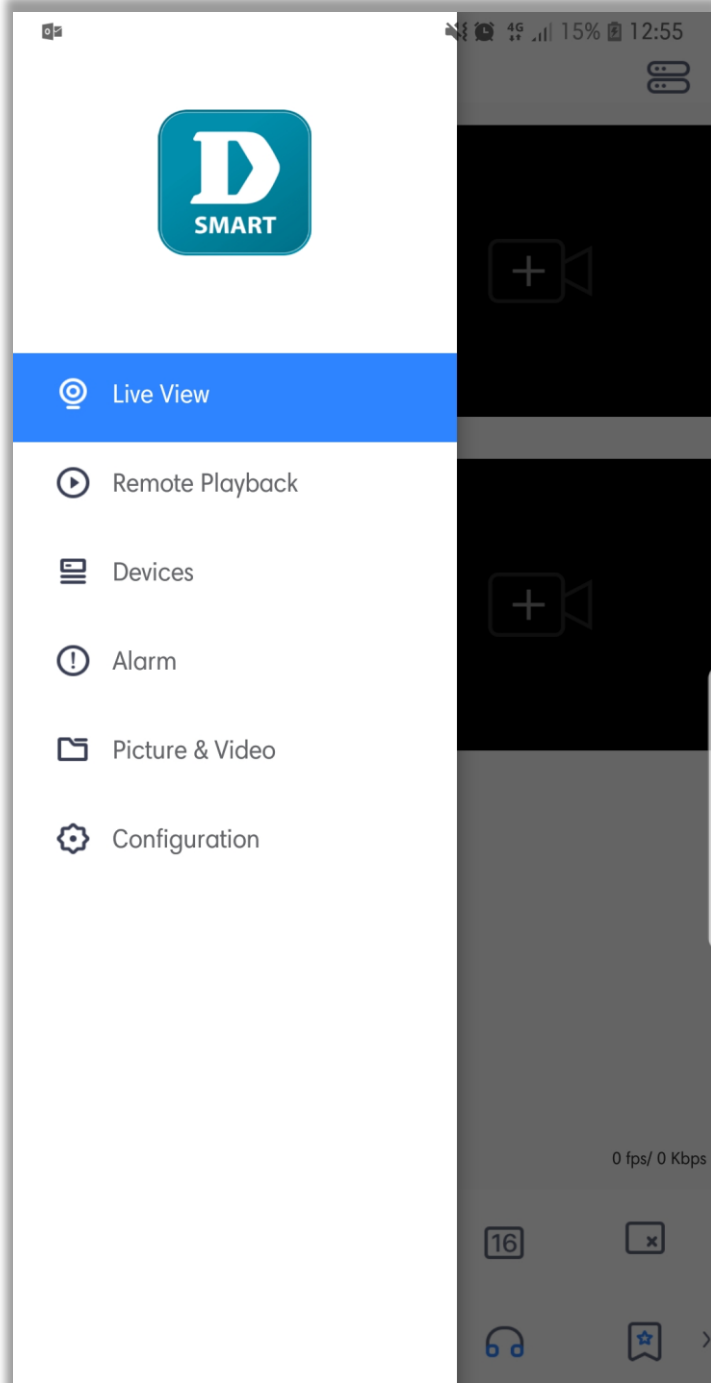

- Click on the Menu  on top left corner to access the Option Slider.
- Here you can access Playback, Devices, Alarm, Saved Pictures & Videos & Configuration
- Now to add a Device on the App, click on 'Devices'



- Once you have accessed the Devices Menu, click on 'Add' button to highlight the options to add the device on the App
- Use 'Manual Adding' option to add a Device manually by using a Cloud Id/ Static Ip/ DDNS
- Use Online Device to scan the Device in the Local Network to get detected automatically and add using Local Ip Address.

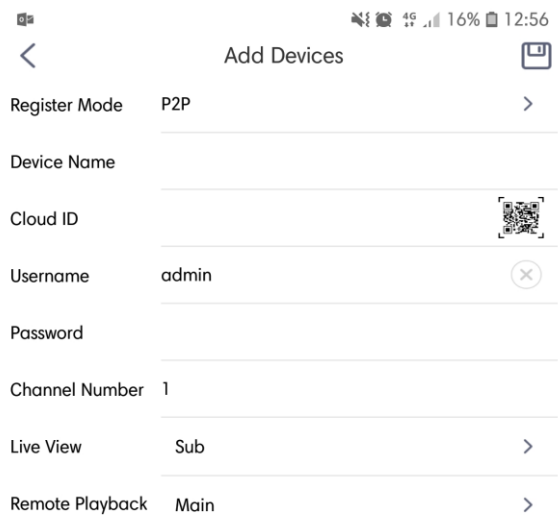

Register Mode P2P

Device Name

Cloud ID



Username admin

Password

Channel Number 1

Live View Sub

Remote Playback Main

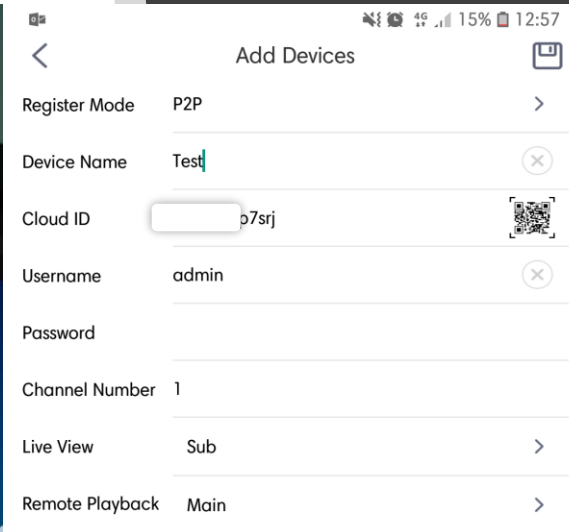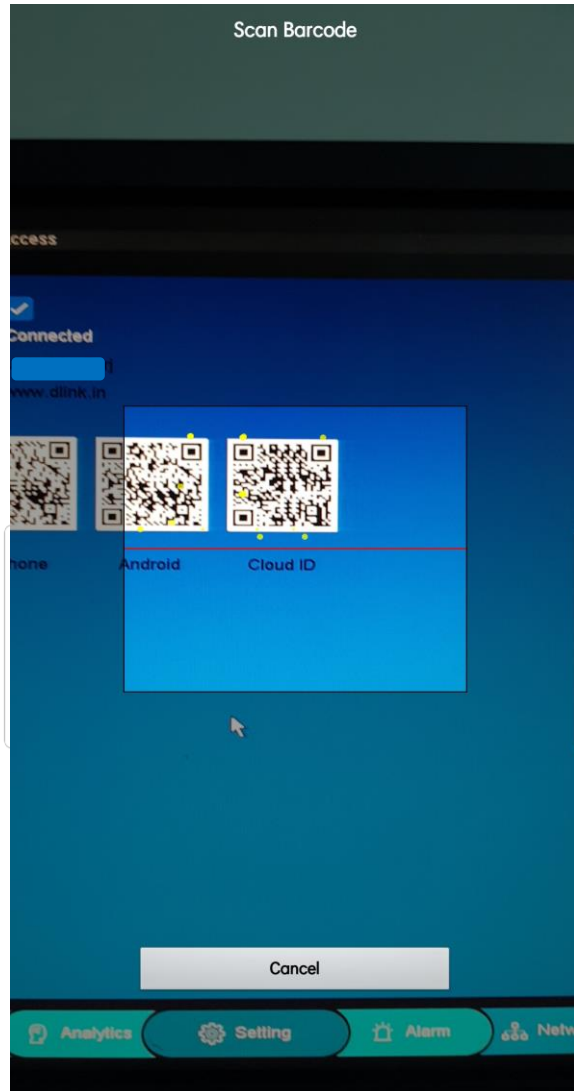

Register Mode P2P

Device Name Test

Cloud ID p7srj

Username admin

Password

Channel Number 1

Live View Sub


Remote Playback Main

- In Add devices Page, assign a Device Name to identify your device
- For Cloud Id, you can either manually enter the Cloud Id in P2P section in your DVR OR You can scan the QR Code available on your DVR P2P section
- Enter the correct Login Credentials for your Device in the Username & Password section and click on 'Save' option on Top Right Corner





Test 1 Playing Test 2 Playing

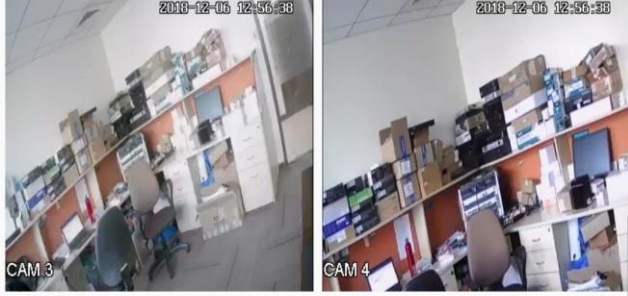

Test 3 Playing Test 4 Playing

10 fps/ 60 Kbps

1 4 9 16 x

📷 🎥 🔄 🎧 ⭐

- On Live View Screen you will be able to view the Live feed through the DVR remotely.
- You can even switch the grids from single channel grid to 4/9/16 channel grids
- Once Live Feed is up there are options to take snapshot and manually record for the channel selected.

Thank You..!!

---